

CAR HAULERS & EQUIPMENT HAULERS



LOAD  TRAIL

CH

CH07 | CH10 | CH14 | CH16 CH21 6" Channel Tandem Axle Carhauler 7,000 - 21,000 Lb GVWR

Stock photo. May be shown with additional options.



Available Sizes

LENGTH	WEIGHT	LENGTH	WEIGHT
83" X 12'	2,305 lbs.	102" X 12'	*
83" X 14'	2,456 lbs.	102" X 14'	*
83" X 16'	2,624 lbs.	102" X 16'	*
83" X 18'	2,783 lbs.	102" X 18'	*
83" X 20'	2,945 lbs.	102" X 20'	*
83" X 22'	3,153 lbs.	102" X 22'	*
83" X 24'	3,723 lbs.	102" X 24'	*
83" X 26'	3,881 lbs.	102" X 26'	*

*Base Weight Estimate Only

*Some sizes not available with different axle ratings.

*Lengths available up to 40FT.

Deck Height - 24"



MAX-RAMPS AVAILABLE



TRIPLE AXLE AVAILABLE



17 COLORS AVAILABLE

STANDARD SPECIFICATIONS

*listed specs based on CH14 base model

- 14,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 6" Channel Tongue
- 6" Channel Frame
- 3" Channel 16" OC Cross-members
- (2) 7,000 lb Dexter Elec/Spring Axles (Forward Self Adjust)
- 15" 5-Hole Wheels w/ ST205/75 R15 LRC Tires
- Multi-Leaf Spring Suspension
- (1) 10,000 lb Drop-Leg Jack
- 2-5/16" Adjustable Coupler
- Straight Deck w/5' Slide-In Ramps
- Removable Diamond Plate Fenders
- (4) 3" Standard D-Rings
- 2" X 2" x 1/8" Tubing Front Rail
- 2" x 2" x 3/16" Angle Iron Uprights (Front Rail)
- (2) - Safety Chains
- Treated Pine Flooring
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

- (2) 3,500 Lb Dexter 2 Elec/Spring (FSA)
- (2) 5,200 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 7,000 Lb Dexter 2 Elec/Spring (FSA)
- (2) 8,000 Lb Dexter 2 Elec/Spring (FSA)

COUPLER OPTIONS

- 2" Adjustable BP Coupler
- 2-5/16" Adjustable BP Coupler (6-Hole)
- 3" Adjustable Pintle Ring (6-Hole)

GATES DOVETAILS, & RAMPS

- 2', 3', or 4' Dove Tail
- (2 or 3) 5' Fold-Up Ramps
- 6' Slide-In Ramps
- 4', 5', or 6' Heavy Duty Fold-up Gate
- 4', 5' or 6' Heavy Duty Split Fold-Up Gate
- 6' Stand-Up Ramps w/ Center Gate
- Double Hinges For Ramps
- MAX-Ramps

OTHER OPTIONS

- ST225/75 R15 LRD Tires
- ST235/85 R16 LRG Tires
- 8" Channel Frame
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Floor
- 12" OC Cross-Members
- Aluminum Fenders
- Steel Diamond Plate Fenders
- Drive-over Fenders
- 7K Drop-Leg Jack
- (1 or 2) 10K Drop-Leg Jack(s)
- 3" or 4" additional d-rings (weld-on, bolt-on, recessed or removable)
- Tongue-Mount Toolbox w/Gas Shock
- Spare Tire & Mount (removable or weld-on)
- Rear Support Stands (tubes or jacks)
- Additional Stake Pockets
- Receiver Hitch
- Running Boards
- 2" Rub Rail
- 9.5K, 12K, or 17.5K Winch Package
- Winch Plate

NOTES

Axles available in straight, drop or torsion, with electric or hydraulic brakes. Drive-over fenders standard on 102" wide carhaulers. 8" Channel Frame & Dual 10K jacks standard on 24 ft.+ Length carhaulers. 18 ft. & up come with rear slide-in ramps. Side Rails can be removable or weld-on. Aluminum fenders available with 3.5K & 5.2K axle options only.

For a complete list of options available for this model, visit us at www.loadtrail.com



CP

CP07 | CP10 | CP14 Angle Frame Tandem Axle Carhauler 7,000 - 14,000 Lb GVWR

Stock photo. May be shown with additional options.



Available Sizes

LENGTH	WEIGHT
83" X 16'	2,900 lbs.
83" X 18'	3,050 lbs.
83" X 20'	3,202 lbs.
83" X 22'	3,353 lbs.
<i>*Base Weight Estimate Only</i>	
<i>*Some sizes not available with different axle ratings.</i>	
Deck Height - 24"	



**FOLD-UP RAMP
AVAILABLE**



**17 COLORS
AVAILABLE**

STANDARD SPECIFICATIONS

**listed specs based on CP14 base model*

- 14,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 5" Channel Tongue
- 3" x 5" Angle Iron Frame
- 3" Channel 16" OC Cross-members
- (2) 7,000 lb Dexter Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires
- Multi-Leaf Spring Suspension
- (1) 10,000 lb Drop-Leg Jack
- 2-5/16" Adjustable Coupler
- Straight Deck w/5' Slide-In Ramps
- Weld-on Diamond Plate Fenders
- 3" Pipe-Top Side Rails w/ 2.5" x 2.5" Angle Uprights
- (4) 3" Standard D-Rings
- (2) - Safety Chains
- Treated Pine Flooring
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

- (2) 3,500 Lb Dexter 2 Elec/Spring (FSA)
- (2) 5,200 Lb Dexter 2 Elec/Spring (FSA)
- (2) 7,000 Lb Dexter 2 Elec/Spring (FSA)

COUPLER OPTIONS

- 2" Adjustable BP Coupler
- 2-5/16" Adjustable BP Coupler (6-Hole)
- 3" Adjustable Pintle Ring (6-Hole)

GATES DOVETAILS, & RAMPS

- 2', 3', or 4' Dove Tail
- (2 or 3) 5' Fold-Up Ramps
- 6' Slide-In Ramps
- 4', 5', or 6' Heavy Duty Fold-up Gate
- 4', 5' or 6' Heavy Duty Split Fold-Up Gate
- 6' Stand-Up Ramps w/ Center Gate
- Double Hinges For Ramps

OTHER OPTIONS

- ST225/75 R15 LRD Tires
- ST235/85 R16 LRG Tires
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Floor
- 12" OC Cross-Members
- 16" OC Cross-Members
- Steel Diamond Plate Fenders
- 5K Top-Wind Jack
- 7K Drop-Leg Jack
- (1 or 2) 10K Drop-Leg Jack(s)
- 3" or 4" additional d-rings (weld-on, bolt-on, recessed or removable)
- Tongue-Mount Toolbox w/Gas Shock
- Spare Tire & Mount (removable or weld-on)
- Rear Support Stands (Tubes or Jacks)
- Additional Stake Pockets
- Receiver Hitch
- 2-3/8" or 3" Pipe-Top Rails (Round or square)
- 16" Solid or Expanded Metal Sides
- Fork Holders
- Mud Flaps
- Front Tool Cage

OTHER OPTIONS

- Running Boards
- 2" Rub Rail
- 9.5K, 12K, or 17.5K Winch Package
- Winch Plate

NOTES

Axles available with electric or hydraulic brakes. 18 ft. & up come with rear slide-in ramps. Side rails are optional on 7K model.

For a complete list of options available for this model, visit us at www.loadtrail.com





CZ07 | CZ10
5" Channel Tandem Axle Sport Hauler
7,000 - 9,990 Lb GVWR

Stock photo. May be shown with additional options.



Available Sizes

LENGTH	WEIGHT
83" X 18'	2,500 lbs.
83" X 20'	2,670 lbs.
83" X 22'	2,840 lbs.
*Base Weight Estimate Only	
Deck Height - 22"	



ALUMINUM TRIM PACKAGE AVAILABLE



17 COLORS AVAILABLE



STONE GUARD AVAILABLE

STANDARD SPECIFICATIONS

*listed specs based on CZ10 base model

- 9,990 lb GVWR
- 5,200 lb GAWR (ea. axle)
- 5" Channel Tongue
- 5" Channel Frame
- 3" Channel 16" OC Cross-members
- (2) 3,500 lb Dexter 1 Elec/Spring Axles (Forward Self Adjust)
- 15" 8-Hole Wheels w/ ST225/75 R15 LRD Tires
- Multi-Leaf Spring Suspension
- (1) 5,000 lb Top-Wind Jack
- 2-5/16" Adjustable Coupler
- 5' Slide-In Ramps (Side Slide-In)
- Weld-on Smooth Plate Tear-Drop Fenders
- (4) 4" Recessed/Rotating D-Rings
- 2" X 2" x 1/8" Square Tube-Top Front Rail
- 2" x 2" x 1/8" Angle Iron Uprights (Front Rail)
- (2) - Safety Chains
- Steel Diamond Plate Flooring
- Straight Deck w/5' Slide-In Ramps
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

- (2) 3,500 Lb Dexter 2 Elec/Spring (FSA)
- (2) 5,200 Lb Dexter 2 Elec/Spring (FSA)

OTHER OPTIONS

- ST205/75 R15 LRC Tire
- ST225/75 R15 LRD Tires
- ST235/85 R16 LRG Tires
- 12" OC Cross-Members
- Aluminum Trim Package
- 42" Aluminum Front Stone Guard
- 7K Drop-Leg Jack
- 10K Drop-Leg Jack
- 3" or 4" additional d-rings (weld-on, bolt-on, recessed or removable)
- Tongue-Mount Toolbox w/Gas Shock
- Spare Tire & Mount (removable or weld-on)
- Additional Stake Pockets

COUPLER OPTIONS

- 2" Adjustable BP Coupler
- 2-5/16" Adjustable BP Coupler (6-Hole)
- 3" Adjustable Pintle Ring (6-Hole)

For a complete list of options available for this model, visit us at www.loadtrail.com



BC

BC10 | BC14
Angle Frame Bobcat
9,990 - 14,000 Lb GVWR



Stock photo. May be shown with additional options.

Available Sizes

LENGTH	WEIGHT
80" X 12'	2,581 lbs.
80" X 14'	2,832 lbs.
80" X 16'	2,945 lbs.
80" X 18'	3,142 lbs.
80" X 20'	3,456 lbs.
<i>*Base Weight Estimate Only</i>	
Deck Height - 18"	



17 COLORS AVAILABLE

**listed specs based on BC14 base model*

- 14,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 6" Channel Tongue
- 4" x 6" Angle Iron Frame
- 3" Channel 16" OC Cross-members
- (2) 7,000 lb Dexter Elec/Drop Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires
- Multi-Leaf Spring Suspension
- (1) 10,000 lb Drop-Leg Jack
- 2-5/16" Adjustable Coupler
- 5' Fold-Up Ramps
- Steel Diamond Plate Fenders (weld-on)
- Tongue-Mount Tool Box
- (4) 3" Standard D-Rings
- 2" X 2" Sq. Tubing Front Rail
- 2" x 2" Angle Uprights (Front Rail)
- (2) - Safety Chains
- 1/8" Steel Diamond Plate Flooring
- 1/8" Steel Diamond Plate Running Boards
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

- (2) 5,200 Lb Dexter 2 Elec/Drop (FSA)
- (2) 7,000 Lb Dexter 2 Elec/Drop (FSA)

COUPLER OPTIONS

- 2" Adjustable BP Coupler
- 2-5/16" Adjustable BP Coupler (6-Hole)
- 3" Adjustable Pintle Ring (6-Hole)

GATES DOVETAILS, & RAMPS

- (2 or 3) 6' Fold-Up Ramps

OTHER OPTIONS

- ST235/85 R16 LRG Tires
- ST215/75 R17.5 LRH Tires
- 12" OC Cross-Members
- (2) 10K Drop-Leg Jack(s)
- MAX-Jack(s) (hydraulic)
- 3" or 4" Additional D-rings (weld-on, bolt-on, recessed or removable)
- Spare Tire & Mount (removable or weld-on)
- Rear Support Stands (Tubes or 5K-7K Jacks)
- Additional Stake Pockets
- Mud Flaps
- 9.5K, 12K, or 17.5K Winch Package
- Winch Plate

For a complete list of options available for this model, visit us at www.loadtrail.com





CS10 | CS14 | CS16 | CS21
6" Channel Tandem Axle Carhauler
w/ 3" Pipe-Top Side Rails
9,990 - 21,000 Lb GVWR

Stock photo. May be shown with additional options.




Available Sizes

LENGTH	WEIGHT	LENGTH	WEIGHT
83" X 12'	2,284 lbs.	102" X 12'	*
83" X 14'	2,466 lbs.	102" X 14'	*
83" X 16'	2,664 lbs.	102" X 16'	*
83" X 18'	2,855 lbs.	102" X 18'	3,155 lbs.
83" X 20'	3,048 lbs.	102" X 20'	3,210 lbs.
83" X 22'	3,286 lbs.	102" X 22'	4,313 lbs.
83" X 24'	3,845 lbs.	102" X 24'	*
83" X 26'	*	102" X 26'	5,308 lbs.

**Base Weight Estimate Only*
**Some sizes not available with different axle ratings.*
 Deck Height - 24"



TRIPLE AXLE AVAILABLE



GOOSENECK AVAILABLE



17 COLORS AVAILABLE

STANDARD SPECIFICATIONS

**listed specs based on CS14 base model*

- 14,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 6" Channel Tongue
- 6" Channel Frame
- 3" Channel 16" OC Cross-members
- (2) 7,000 lb Dexter Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires
- Multi-Leaf Spring Suspension
- (1) 10,000 lb Top-Wind Jack
- 2-5/16" Adjustable Coupler
- Straight Deck w/5' Slide-In Ramps
- Steel Diamond Plate Fenders (weld-on)
- (4) 3" Standard D-Rings
- 3" Pipe-Top Side Rails w/ 2" x 2" 3/16" Angle Uprights
- (2) - Safety Chains
- Treated Pine Flooring
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

- (2) 5,200 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 7,000 Lb Dexter 2 Elec/Spring (FSA)

COUPLER OPTIONS

- 2" Adjustable BP Coupler
- 2-5/16" Adjustable BP Coupler (6-Hole)
- 3" Adjustable Pintle Ring (6-Hole)
- 2-5/16" Rd. Adjustable GN Coupler (25K or 30K)
- 2-5/16" Sq. Adjustable GN Coupler (25K or 30K)

GATES DOVETAILS, & RAMPS

- 2', 3', or 4' Dove Tail
- (2 or 3) 5' Fold-Up Ramps
- 6' Slide-In Ramps
- 4', 5', or 6' Heavy Duty Fold-up Gate
- 4', 5' or 6' Heavy Duty Split Fold-Up Gate
- 6' Stand-Up Ramps w/ Center Gate
- Double Hinges For Ramps

OTHER OPTIONS

- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Floor
- 12" OC Cross-Members
- (1 or 2) 10K Drop-Leg Jack(s)
- 3" or 4" additional d-rings (weld-on, bolt-on, recessed or removable)
- Tongue-Mount Toolbox w/Gas Shock
- Spare Tire & Mount (removable or weld-on)
- Rear Support Stands (Tube)
- Additional Stake Pockets
- Receiver Hitch
- 2-3/8" or 3" Pipe-Top Rails (Round or square)
- 9.5K, 12K, or 17.5K Winch Package
- Winch Plate

NOTES

Axles available in straight, drop or torsion, with electric or hydraulic brakes. Drive-over fenders standard on 102" wide carhaulers. 8" Channel Frame & Dual 10K jacks standard on 24 ft.+ length carhaulers. 80" max frame width with drop & torsion axle options. 18 ft. & up come with rear slide-in ramps. Steel DP fenders can be weld-on or removable. Side Rails can be removable or weld-on. Rub rail option not available with removable side rail option.

For a complete list of options available for this model, visit us at www.loadtrail.com





EH20
10" I-Beam Frame Tandem Axle
Equipment Hauler | 20,000 Lb GVWR



Stock photo. May be shown with additional options.

Available Sizes

LENGTH	WEIGHT	LENGTH	WEIGHT
82" X 16'	*	102" X 16'	*
82" X 18'	4,900 lbs.	102" X 18'	*
82" X 20'	5,020 lbs.	102" X 20'	*
82" X 22'	5,160 lbs.	102" X 22'	*
82" X 24'	5,280 lbs.	102" X 24'	*
82" X 26'	5,420 lbs.	102" X 26'	*
82" X 28'	*	102" X 28'	*
82" X 30'	*	102" X 30'	*
*Base Weight Estimate Only			
*Lengths Up To 40FT Available			
Deck Height - 27"			



MAX-RAMPS AVAILABLE



17 COLORS AVAILABLE

STANDARD SPECIFICATIONS

**listed specs based on EH20 base model*

- 20,000 lb GVWR
- 10,000 lb GAWR (ea. axle)
- 10" I-Beam Tongue
- 10" I-Beam Frame
- 3" Channel 16" OC Cross-members
- (2) 10,000 lb Dexter 2 Elec/Torsion Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST215/75 R17.5 LRH Tires
- Torsion Suspension
- (2) 10,000 lb Drop-Leg Jacks
- 2-5/16" Adjustable Coupler
- Straight Deck w/ 5' Slide-In Ramps
- Steel Diamond Plate Fenders (weld-on)
- Front Tool Tray
- 2" Rub Rail, Pipe Spools, & Stake Pockets
- (2) - Safety Chains
- Treated Pine Flooring
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/ 7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

(2) 10,000 Lb Dexter 2 Elec/Torsion (FSA)

OTHER OPTIONS

ST215/75 R17.5 LRH (Singles or Duals)

Steel Diamond Plate Floor

Rough Oak Floor

Douglas Fir Floor

Blackwood Floor

12" OC Cross-Members

(2) 25K Drop-Leg Jacks (2-Speed)

(2) Hydraulic Jacks (MAX-Jack)

LED Light Bar (Single or Dual Row)

3" or 4" additional d-rings (weld-on, bolt-on, removable or recessed)

Spare Tire & Mount (removable or weld-on)

Rear Support Stands (Tube or 5K-7K Jacks)

Tongue-Mount Tool Box

Additional Stake Pockets

2" Rub Rail

9.5K, 12K, or 17.5K Winch Package

Winch Plate

Tool Box W/ Gas Shocks

COUPLER OPTIONS

2-5/16" Adjustable BP Coupler (6-Hole)

2-5/16" Adjustable BP Coupler (Flat-Mount)

3" Adjustable Pintle Ring (6-Hole)

3" Adjustable Pintle Ring (Flat-Mount)

GATES DOVETAILS, & RAMPS

2' or 3' Dove Tail

5' Fold-Up Ramps

MAX-Ramps

Double Hinges For Ramps

For a complete list of options available for this model, visit us at www.loadtrail.com





EG20
10" I-Beam Tandem Axle Goose-
neck Equipment Hauler
20,000 Lb GVWR

Stock photo. May be shown with additional options.



Available Sizes

LENGTH	WEIGHT	LENGTH	WEIGHT
82" X 16'	*	102" X 16'	*
82" X 18'	*	102" X 18'	*
82" X 20'	*	102" X 20'	*
82" X 22'	*	102" X 22'	*
82" X 24'	*	102" X 24'	*
82" X 26'	*	102" X 26'	*
82" X 28'	*	102" X 28'	*
82" X 30'	*	102" X 30'	*
*Base Weight Estimate Only			
*Lengths up to 40FT available			
Deck Height - 27"			



MAX-RAMPS AVAILABLE



17 COLORS AVAILABLE

STANDARD SPECIFICATIONS

**listed specs based on EG20 base model*

- 20,000 lb GVWR
- 10,000 lb GAWR (ea. axle)
- 10" I-Beam Neck
- 10" I-Beam Frame
- 3" Channel 16" OC Cross-members
- (2) 10,000 lb Dexter 2 Elec/Torsion Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST215/75 R17.5 LRH Tires
- Torsion Suspension
- (2) 10,000 lb Drop-Leg Jacks
- 2-5/16" Round Adjustable GN Coupler (25K)
- Straight Deck w/8' Slide-In Ramps
- Front Full-width Tool Box
- Steel Diamond Plate Weld-on Fenders
- 2" Rub Rail, Pipe Spools, & Stake Pockets
- (2) - Safety Chains
- Treated Pine Flooring
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/ Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

(2) 10,000 Lb Dexter 2 Elec/Torsion (FSA)

OTHER OPTIONS

- ST215/75 R17.5 LRH (Singles or Duals)
- Locking Chain Rack
- Deck On Neck (102" X 96" w/45° corners)
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Floor
- 12" OC Cross-Members
- (2) 25K Drop-Leg Jacks (2-Speed)
- (2) Hydraulic Jacks (MAX-Jack)
- LED Light Bar (Single or Dual Row)
- 3" or 4" additional d-rings (weld-on, bolt-on, or recessed)
- 6" Raised Neck & Coupler
- 12" Raised Neck & Coupler
- Top Riser Toolbox
- Fold Down Spare Tire Mount
- Rear Support Stands (Tube or 5K-7K Jacks)
- Additional Stake Pockets
- Fork Holder
- 9.5K, 12K, or 17.5K Winch Package
- Winch Plate

COUPLER OPTIONS

- 2-5/16" Rd Adjustable GN Coupler
- 2-5/16" Sq Adjustable GN Coupler

GATES DOVETAILS, & RAMPS

- 2' or 3' Dove Tail
- 5' Fold-Up Ramps
- Double Hinges For Ramps

For a complete list of options available for this model, visit us at www.loadtrail.com



GC

GC10 | GC14 | GC21 6" Channel Tandem Axle Carhauler 7,000 - 21,000 Lb GVWR

Stock photo. May be shown with additional options.



Available Sizes

LENGTH(83")	WEIGHT (83")	LENGTH(102")	WEIGHT (102")
83" X 16'	*	102" X 16'	3,192 lbs.
83" X 18'	*	102" X 18'	*
83" X 20'	3,502 lbs.	102" X 20'	4,170 lbs.
83" X 22'	3,846 lbs.	102" X 20'	*
83" X 24'	*	102" X 24'	*
83" X 26'	*	102" X 26'	*
83" X 28'	*	102" X 28'	*
83" X 30'	*	102" X 30'	*
83" X 32'	*	102" X 32'	*
83" X 34'	*	102" X 34'	*
83" X 36'	*	102" X 36'	*
83" X 38'	*	102" X 38'	*
83" X 40'	*	102" X 40'	*

**Base Weight Estimate Only*
**Some sizes not available with different axle ratings.*
 Deck Height - 25"



MAX-RAMPS AVAILABLE



17 COLORS AVAILABLE

STANDARD SPECIFICATIONS

**listed specs based on GC14 base model*

- 14,000 lb GVWR
- 7,000 lb GAWR (ea. axle)
- 10" I-Beam Neck
- 6" Channel Frame
- 3" Channel 16" OC Cross-members
- (2) 7,000 lb Dexter 2 Elec/Spring Axles (Forward Self Adjust)
- 16" 8-Hole Wheels w/ ST235/80 R16 LRE Tires
- Multi-Leaf Spring Suspension
- (1) 10,000 lb Drop-Leg Jack
- 2-5/16" Adjustable Round Gooseneck Coupler
- Straight Deck w/5' Slide-In Ramps
- Steel Diamond Plate Fenders (removable)
- Full-width Front Tool Box
- (4) 3" Standard D-Rings
- (2) - Safety Chains
- Treated Pine Flooring
- LED Lighting
- 16 Ga. 5-Way Double-Insulated Harness w/7-way Plug & Front Polar Cord
- Mechanical and/or Chemical Pretreatment for Maximum Paint Adhesion
- Black - Sherwin-Williams Powdura OneCure Primer w/Polyester TGIC Gloss Powder Topcoat

AXLE OPTIONS

- (2) 5,200 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 7,000 Lb Dexter 2 Elec/Spring (FSA)
- (2 or 3) 8,000 Lb Dexter 2 Elec/Spring (FSA)

COUPLER OPTIONS

- 2-5/16" Rd. Adjustable GN Coupler (25K or 30K)
- 2-5/16" Sq. Adjustable GN Coupler (25K or 30K)

GATES DOVETAILS, & RAMPS

- 2', 3', or 4' Dove Tail
- (2 or 3) 5' Fold-Up Ramps
- 6' Slide-In Ramps
- MAX-Ramps
- 4', 5', or 6' Heavy Duty Fold-up Gate
- 4', 5' or 6' Heavy Duty Split Fold-Up Gate
- 6' Stand-Up Ramps w/ Center Gate
- 80" or 90" Slide-Out Ramps
- Double Hinges For Ramps

OTHER OPTIONS

- ST225/75 R15 LRD Tires
- ST235/85 R16 LRG Tires
- 8" Channel Frame
- Steel Diamond Plate Floor
- Rough Oak Floor
- Douglas Fir Floor
- Blackwood Floor
- 12" OC Cross-Members
- Aluminum Fenders
- Steel Diamond Plate Fenders
- Drive-over Fenders
- (1 or 2) 10K Drop-Leg Jack(s)
- 1 or 2 Hydraulic MAX-Jack(s)
- Deck On Neck (102" X 96" w/45° corners)
- Locking Chain Rack
- Top Riser Toolbox
- 6" Raised Neck & Coupler
- 12" Raised Neck & Coupler
- 3" or 4" additional d-rings (weld-on, bolt-on, recessed or removable)
- Rear Support Stands (tubes or jacks)
- Additional Stake Pockets
- Receiver Hitch
- Fold-down Spare Tire Mount

OTHER OPTIONS

- Running Boards
- 2" Rub Rail
- 9.5K, 12K, or 17.5K Winch Package
- 1/2" Winch Plate

NOTES

Axles available in straight, drop or torsion, with electric or hydraulic brakes. Drive-over fenders standard on 102" wide carhaulers. 8" Channel Frame & Tandem 10K jacks standard on 24 ft.+ length carhaulers. 80" max frame width with drop & torsion axle options. 18 ft. & up come with rear slide-in ramps. 36FT & up lengths get 10" I-Beam frame. 10" I-Beam frame model has a 29" deck height.

For a complete list of options available for this model, visit us at www.loadtrail.com



POPULAR OPTIONS



Running Boards



MAX-Ramps



LED Light Bar



MAX-Jack (Hyd.)



ST215/75 R17.5 Wheels & Tires




Fold-Up Ramps



Blackwood Flooring



Deck-Over-Neck

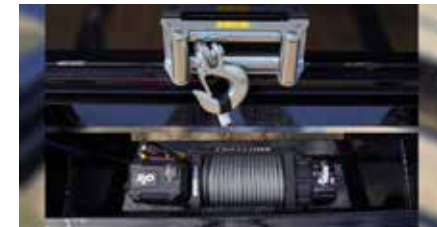

Winch/Winch Plate Combo

KEY ADVANTAGES

- Industry Best Warranty
- Roadside Assistance
- National Dealer Network
- Commercial Grade Construction
- Dexter E-Z Lube Axles / Oil Bath Axles*
- Dexter Nev-R Adjust™ Forward Self Adjusting Electric Brake Axles
- Sherwin Williams® Powder Coat
- Primer Standard
- Radial Tires Standard
- Powder Coated Wheels
- Spare Tire Standard Select Models
- Channel & I-Beam Frame Construction
- 16" On-Center Cross-members
- State Pockets & D-rings
- Wrapped Tongue
- Pressure Treated 2x6 Decking
- Recessed DOT Compliant LED Lighting
- Premium Fully Sealed Wiring Harness w/Polar Cord
- NATM Compliant
- Sandblasted and Zirconium Washed
- Hand Pinstriping
- Innovative Design
- Endless Options for Customization
- Made in USA

