



# LY LOW-PRO WITH HYDRAULIC DOVE

## STANDARD CONFIGURATION SPECS

THESE ARE THE DEFAULT SPECS THAT ARE INCLUDED IN THE BASE CONFIGURATION OF THIS MODEL.

Deck Width: <b>102"</b>	Deck Height: <b>33"</b>	Axles: <b>Tandem (2 x 10,000 lb., 12,000 lb., or 15,000 lb.)</b>	Ramp Types: <b>N/A</b>
Length: <b>30' - 40'</b>	Couplers: <b>Gooseneck</b>	Load Capacity: <b>15,770 - 22,070 lbs.</b>	Frame Type: <b>12" x 19 lbs. I-Beam</b>
GVWR: <b>25,000 - 30,000 lbs.</b>	Weight: <b>7,930 - 9,230 lbs.</b>	Tail Types: <b>10' Hydraulic Dovetail</b>	Choose the optional Monster Jacks to make hooking up a breeze.

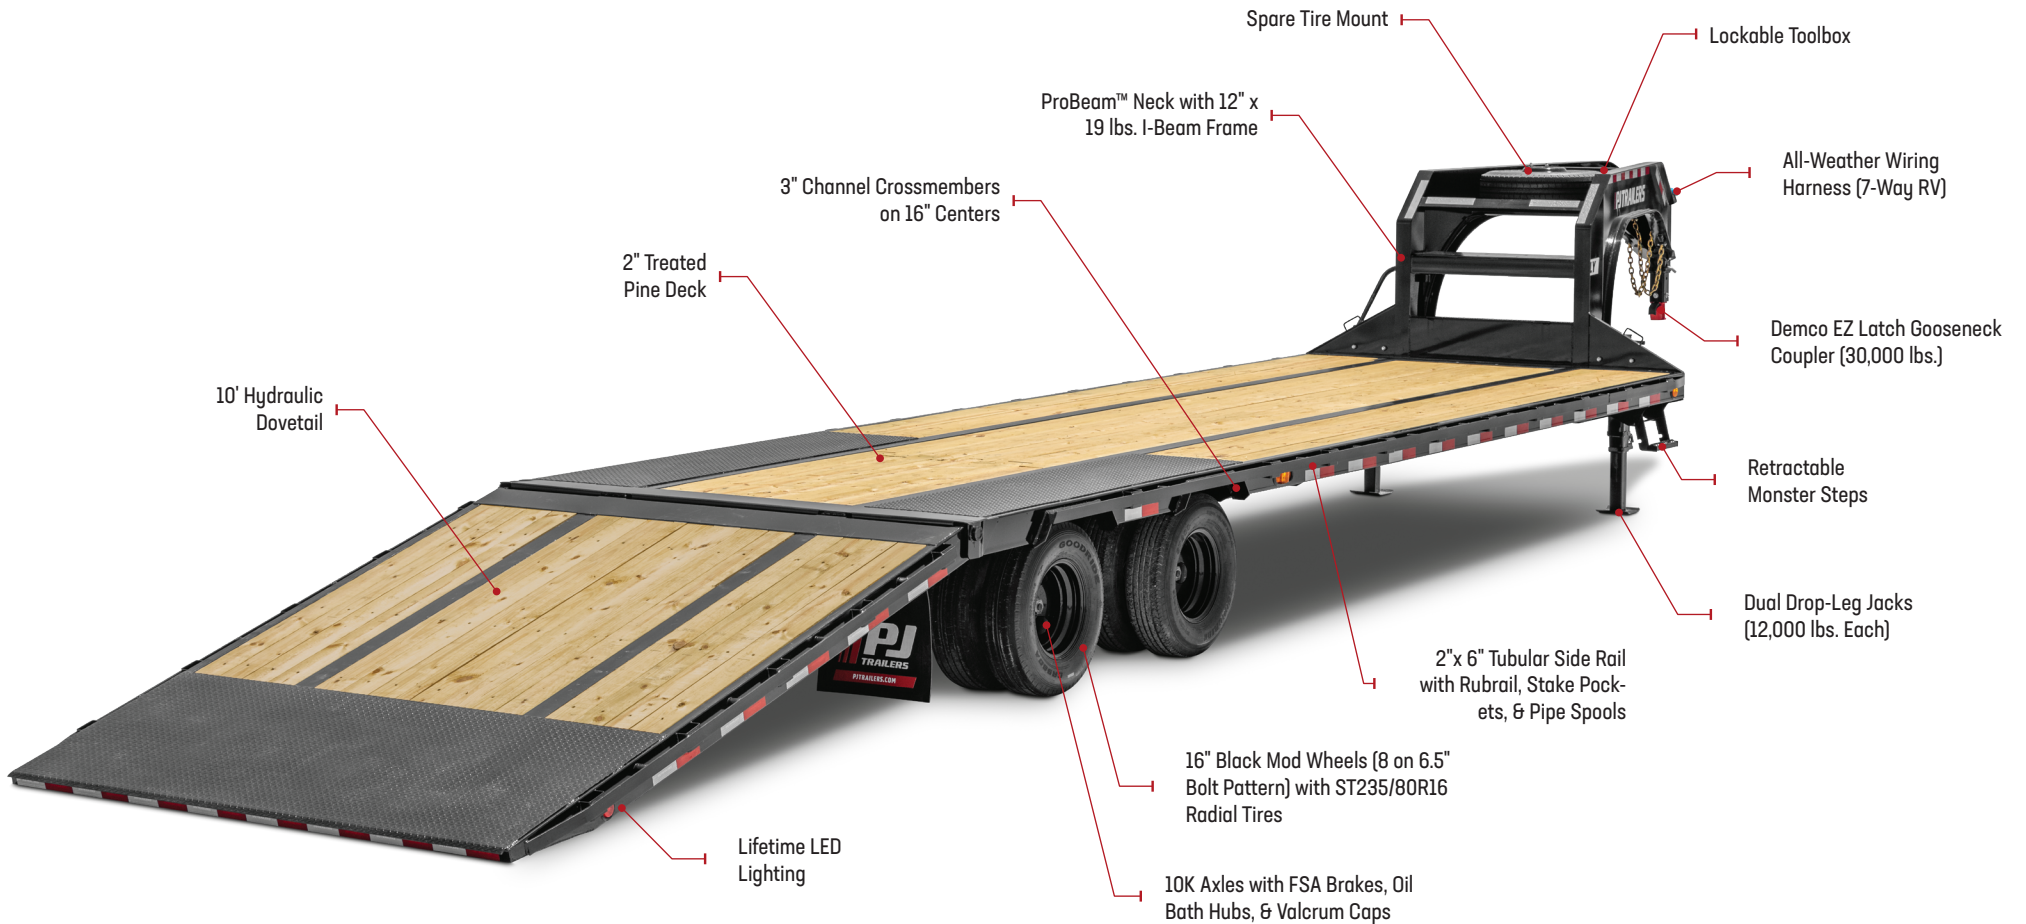

This innovative feature utilizes lateral torsion supports, specifically engineered to counter rotational forces in the frame during operation. It is standard on models 30' and up or optional on shorter lengths.

**TWISTGUARD™ FRAME DESIGN**



The Formed ProBeam™ Gooseneck features a sleek new shape, is constructed from a single piece of heavy-duty steel, and has been redesigned to help reduce weight and redistribute stress points.

**FORMED PROBEAM™ GOOSENECK**



The Demco EZ Latch Gooseneck Coupler is the first of its kind, offering the reliability of Demco's EZ Latch system together with a custom housing for the ultimate in convenience to hitch up and go.

**DEMCO EZ LATCH GOOSENECK COUPLER**



Simplify loading and unloading with our cutting-edge Hydraulic Dovetail feature. This push-button design allows for effortless raising and lowering of the dovetail, accommodating a variety of equipment sizes and ensuring a seamless and secure hauling experience.

**INNOVATIVE 10' HYDRAULIC DOVE**