



The "HIRED HAND®" Dual Wheel

Model: HHG8205F20


8 ½' Width x 20 + 5' (25') Length Gooseneck Deckover w/Farm Dove



- | | | |
|---|-----------------------------------|--|
| (2) 10K Elec. Axles; Oil Bath w/48.5" Axle Spread | Break-A-Way Kit | 2" Treated Lumber Floor |
| ST235-80R-16" 10-PR Tires on Dual Wheels | H.D. Safety Chains | Stake Pockets on 16" Cntrs & 2" Rub Rail |
| 2 5/16" Adj. Coupler | Lockable Tool Box b/t Jacks | Rubber Mounted Sealed L.E.D. Lights |
| (2) Dual Pin S.L. Dropleg Jacks (24K) | Assist Step w/Handle x 2 | Sealed Wiring Harness |
| 5' Self Cleaning Dove (a/k/a Farm Dove) | Mud Flaps | Undercarriage Cross Bracing |
| (3/ea) X-Wide (21") Level Bed Double Swvl, Sprg Asstd. Rmps | Pierced Frame w/ Plate Over Tires | Spare Tire/Wheel Mtd. |
| 2-Component Epoxy & Polyurethane Primer & Top Coat | | |

(Ship Wt.: 6,250# GAWR: 20,000# GVWR: 20,000)

MAINFRAME & NECK: 12" 19# Beam **DECK HEIGHT:** Approx. 33 ½" **DOVE CLRNC:** Approx. 13"
CROSS MEMBERS: 3" Channel **CENTERS:** 16"

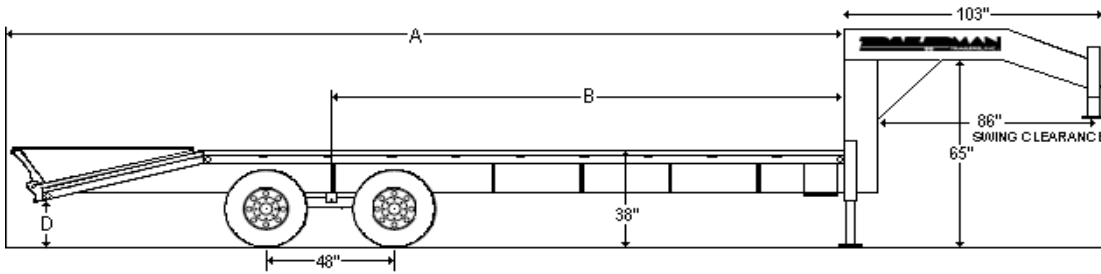

Measurements <i>when equipped with 5' dove tail</i>		
Length	A	B
16	192	120
18	216	136
20	240	151
22	264	166
24	288	182
25	300	188
26	312	197
28	336	212
30	360	226
32	384	242
34	408	257
36	432	272
38	456	287
40	480	302
42	504	317
44	528	332

All measurements are approximate

D	DOVE TAIL	RAMP DESCRIPTION
13"	F arm	(3/ea) X-Wide (21") Level Bed Double Swvl, Spring Asstd, Ramps
13"	R anch	5' Pop Up Cntr b/t (2/ea) XX Wide (29") (dbl spg asstd, dmnd plt, & strps)
13"	E quipment	(2/ea) XX Wide (29") Ramps Level Bed (dbl spg asstd, dmnd plt, & strps)
13"	C olossal	(2/ea) XXX Wide (44") Ramps Level Bed (dbl spg asstd, dmnd plt, & strps)

SOME AVAILABLE OPTIONS	
Additional Footage up to 44'	8' x 6' Top Deck-Over-Neck
12,000# Elec Axles	Underbody Lockable Tool Box; 18 x 18 x 36"
Electric-Over-Hydraulic Brakes	Twin 2-Speed Jacks

VISIT OUR WEBSITE TO FIND AN AUTHORIZED TRAILERMAN® DEALER:

www.trailertrailer.com